


## **Butt Weld Cap**



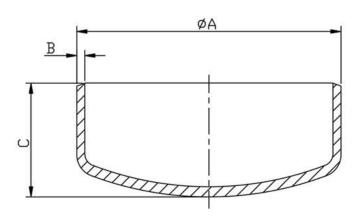

	Schedule 10				Schedule 40			
SIZE	DIMENSIONS				DIMENSIONS			
	Α	В	С	KG	Α	В	С	KG
1/2	21.3	2.11	25.4	0.04	21.3	2.77	25.4	0.05
3/4	26.6	2.11	25.4	0.05	26.6	2.87	25.4	0.06
1	33.4	2.77	38.1	0.09	33.4	3.38	38.1	0.11
1-1/4	42.1	2.77	38.1	4.45	42.1	3.56	38.1	0.15
1-1/2	48.1	2.77	38.1	0.11	48.1	3.68	38.1	0.17
2	60.3	2.77	38.1	0.13	60.3	3.91	38.1	0.23
2-1/2	73	3.05	50.4	0.17	73	5.16	50.4	0.42
3	88.9	3.05	63.5	0.24	88.9	5.49	63.5	0.66
4	114.3	3.05	76.2	0.36	114.3	6.02	76.2	1.17
5	141.3	3.4	88.9	0.59	141.3	6.55	88.9	1.90
6	168.3	3.4	101.6	0.98	168.3	7.11	101.6	2.83
8	219.08	3.76	127	2.75	219.08	8.18	127	5.50
10	273	4.19	152.4	1.35	-		\\ -	-
12	323.8	4.47	177.8	7.05	-		-	-

Our range of BUTT WELD Caps are made to ANSI B16.9 and MSS SP43. They are available in schedule 10-40 thickness and 316/L or 304/L material grades.

Certificates are available upon request.





